



SSM P/N CQJ06802

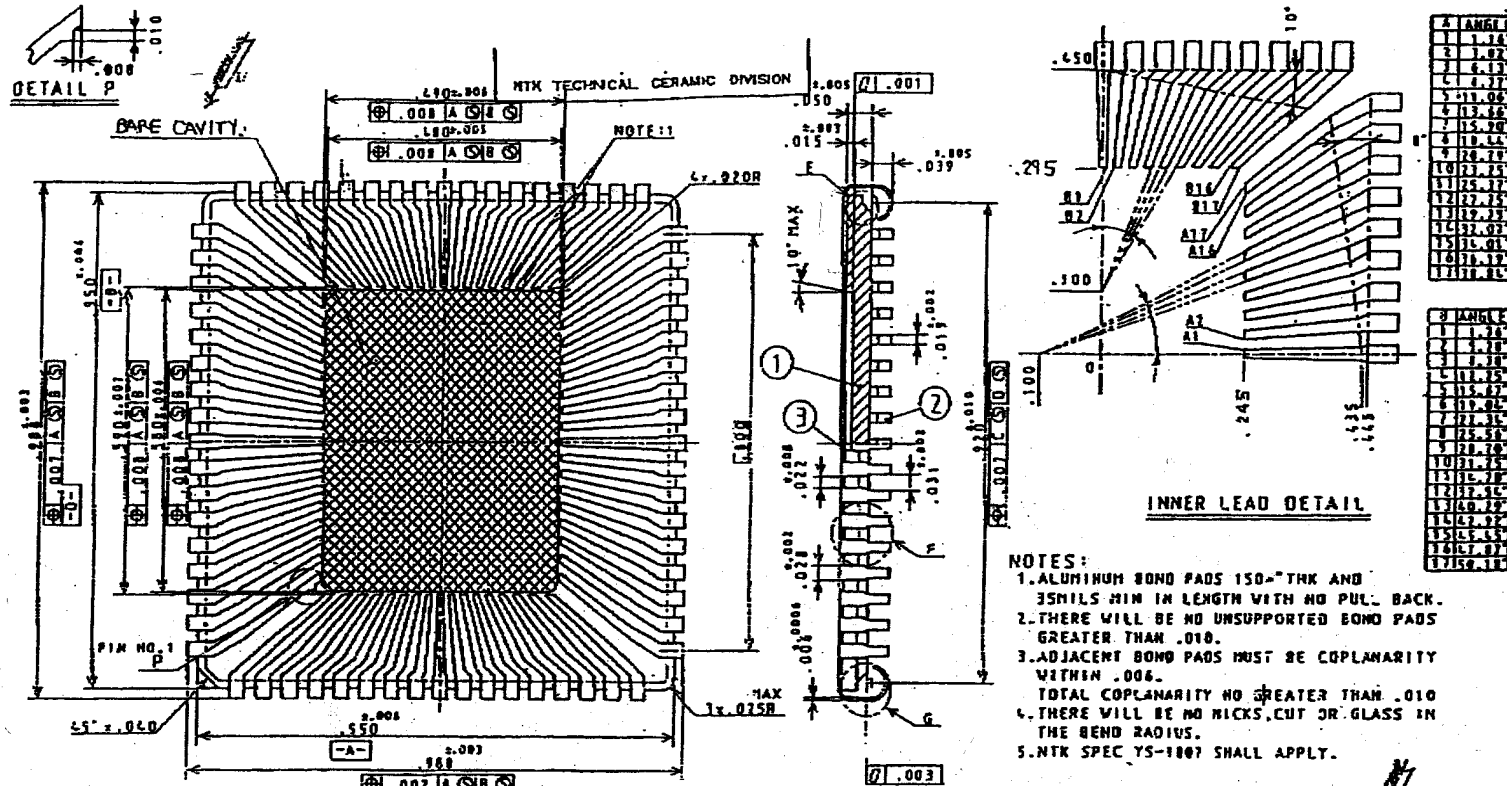

- NOTES:
1. ALUMINUM BOND PADS 150- μ THK AND 35MILS MIN IN LENGTH WITH NO PULL BACK.
 2. THERE WILL BE NO UNSUPPORTED BOND PADS GREATER THAN .010.
 3. ADJACENT BOND PADS MUST BE COPLANARITY WITHIN .000. TOTAL COPLANARITY NO GREATER THAN .010
 4. THERE WILL BE NO NICKS, CUT OR GLASS IN THE BEND RADIUS.
 5. NTK SPEC YS-1007 SHALL APPLY.

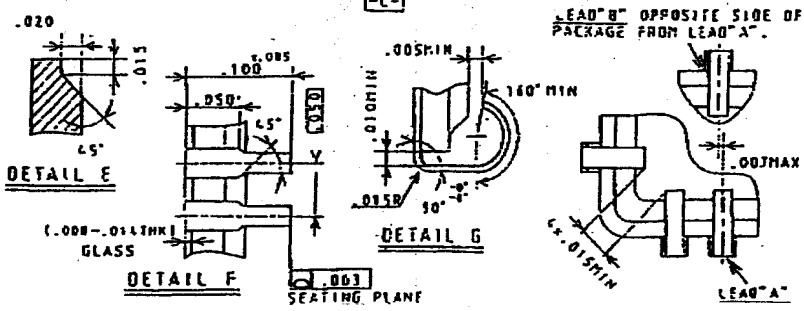

3	SOLDER GLASS	CORNING 1583			OWNED & CONTROLLED BY NTK TECHNICAL CERAMICS
2	LEAD FRAME	ALLOY 42			NTK TECHNICAL CERAMICS
1	CERAMIC BASE	BLACK ALUMINA			NTK SPARK PLUG CO., LTD
Rev	Drawn	Material	Description	Rev.	Description
	UNLESS OTHERWISE SPECIFIED TOLERANCES: ± 1% N.L.T. 3 DECIMALS, XX ± .03 3 DECIMALS, XXX ± .005		M. J. J.		NTK TECHNICAL CERAMICS
	CUSTOMER		CHECKED <i>Z. Zick</i>		NGK SPARK PLUG CO., LTD
	DRW NO.		APPROVED		TITLE
					1.400 x .5801
			UNIT INCH		4 LEAD "J" CERAMIC QUAD PKG
			SCALE		DWG NO. 16820-7016A
					SIZE A-3

