

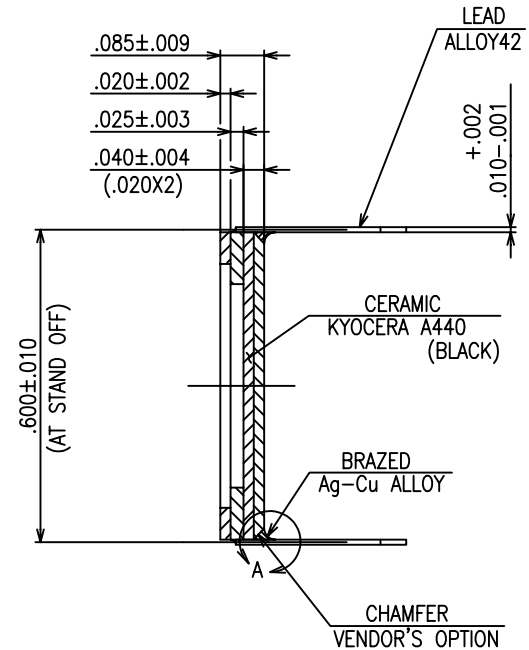


SSM P/N: CSB02813

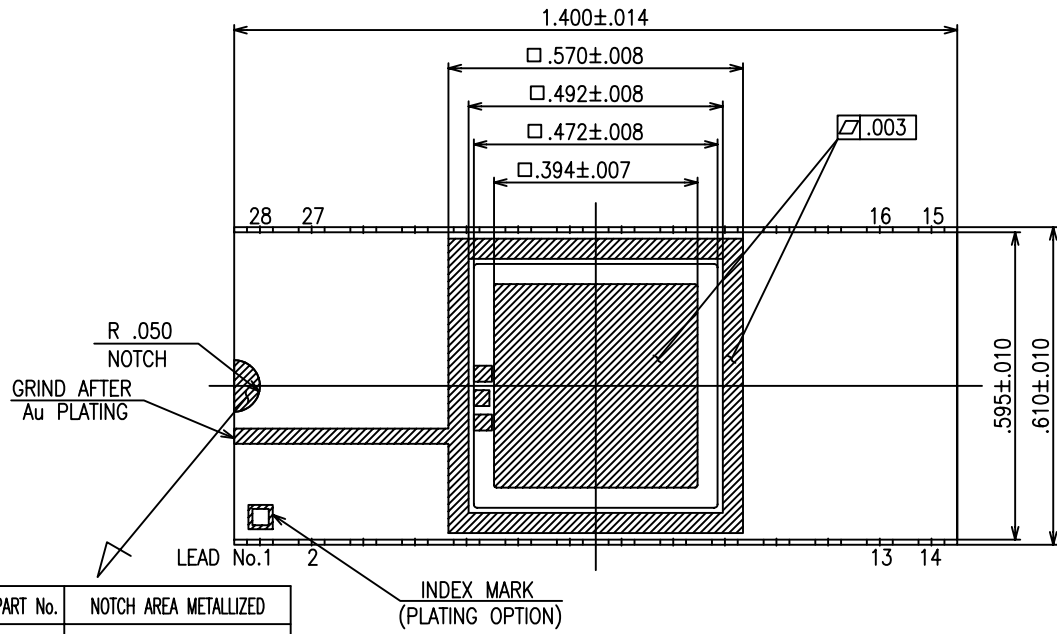

PART No.	NOTCH AREA METALLIZED
O1	WITH METALLIZATION.
O2	WITHOUT METALLIZATION.


△

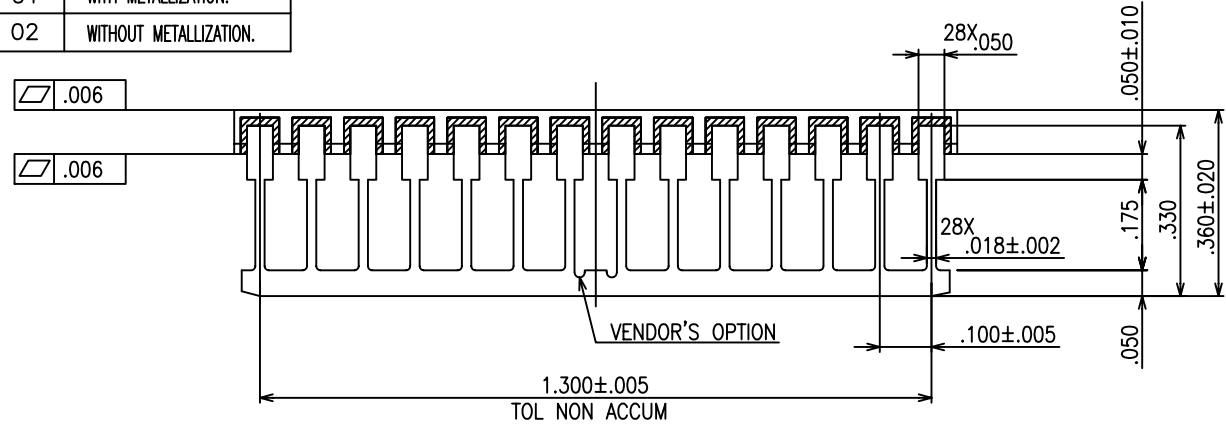

SB028M759-2				S=0 D=0
SB028M759-1				S=0 D=0
DRAWN	CHECKED	APPROVED	DATE	
S.SE	S.T	T.A	K.M	
DRAWING NO.				SHEET
KD-S82759-B				1/2

MODIFICATION					NAME	TOLERANCE
					28 LEAD SIDE BRAZED PACKAGE	UNLESS OTHERWISE SPECIFIED
	△	ADDED : PART No.02, CHANGED : SHEET No.2	DEC.06.'06	Y.H	Y.A	TO.H
△	REDRAWN : CONVERTED CAD DATA	OCT.18.'92	S.SE	S.T	T.A	K.M
	CHANGED	DATE	DRAWN	CHECKED	APPROVED	
					SCALE 4/1	MATERIAL AS INDICATED
						KYOCERA CORPORATION KYOTO JAPAN
						TOLERANCE ±.005 THIRD ANGLE PROJECTION



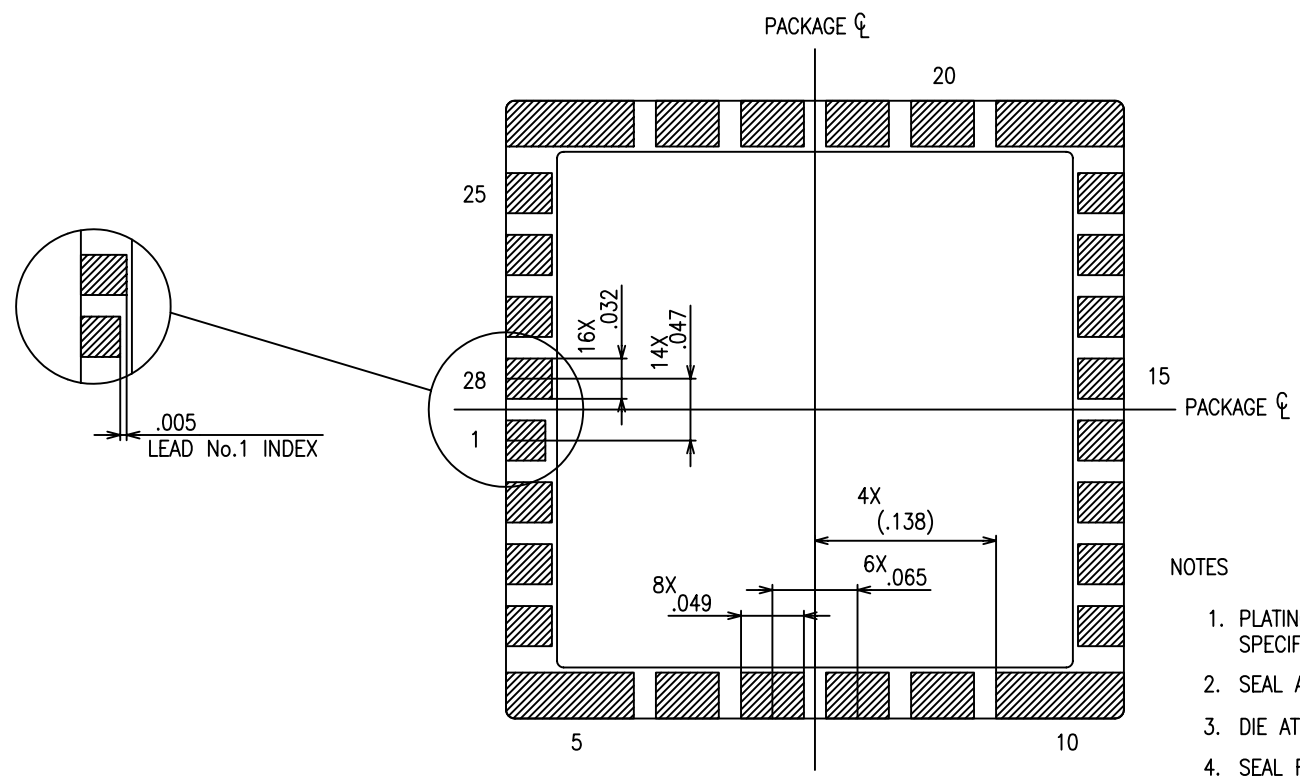

- NOTES
1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
 2. SEAL AREA TO BE METALLIZED.
 3. DIE ATTACH AREA TO BE METALLIZED.
 4. SEAL RING AND DIE ATTACH PAD TO BE FLOATING FROM ANY LEADS.
 5. LEAD RESISTANCE: 0.35 OHM MAX.
 6. WIRE BOND PAD CONNECTED TO CORRESPONDED OUTER LEAD.

MODIFICATION						NAME 28 LEAD SIDE BRAZED PACKAGE	TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN S.SE	CHECKED S.T	APPROVED K.M	DATE OCT.18.'92
	△B	ADDED : NOTE 6	DEC.06.'06	Y.H Y.A	TO.H M.SU	H.SA	SCALE 10 / 1	MATERIAL	THIRD ANGLE PROJECTION		
△A	REDRAWN : CONVERTED CAD DATA CHANGED	OCT.18.'92	S.SE	S.T T.A	K.M			DRAWING NO. KD-S82759-B		SHEET 2 / 2	



