
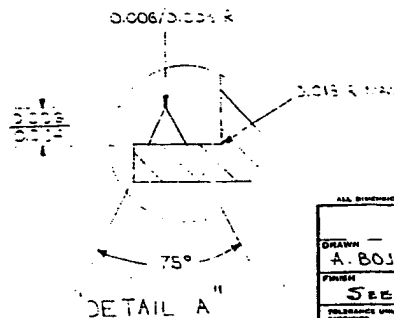
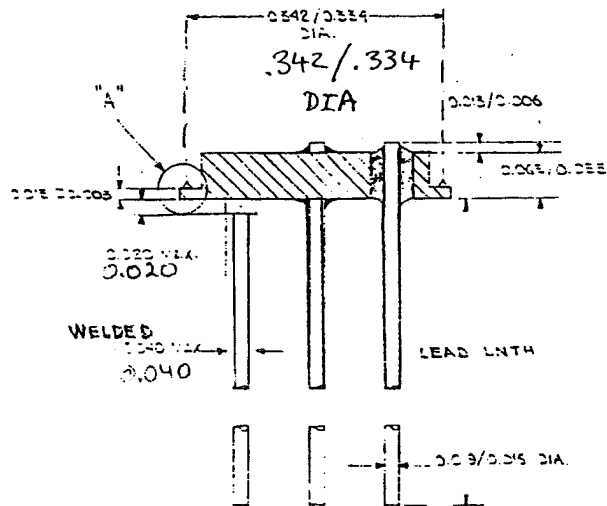


SSM P/N HDR03914
(CAT. NO. 7228)

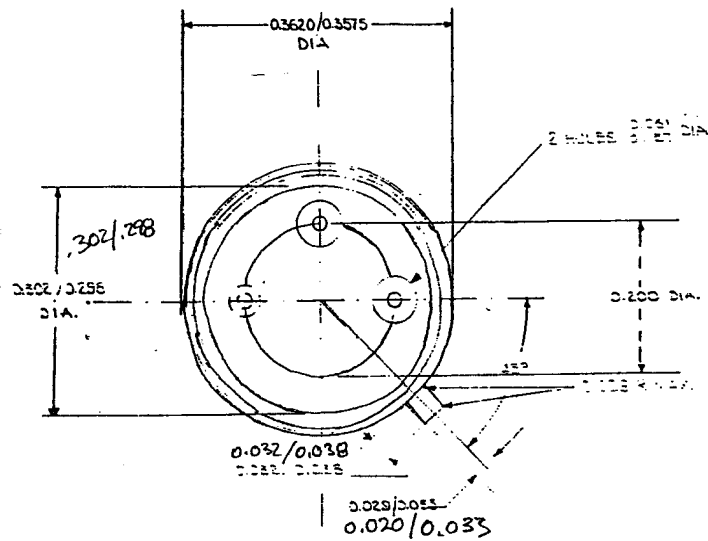

NOTES:

- 1- FOR INSPECTION CRITERIA SEE MASS 72.
- 2- POST HEIGHT AND FLANGE THICKNESS ARE MAJOR ACCEPTANCE LEVELS.

3-

CAT. No.	NICKEL PLATED (μ")		GOLD PLATED (μ")		LEAD LNTH
	PRE-FUSED EYELET	FINAL LEAD FULL	BETA SCOPE MIN. DIA	TRACU LEAD	
7228	200-350	40-160 50-350			0.500 0.560
7229	400-480	50-160 50-350	30	FULL	0.500 0.560
7244	200-350	40-160 50-350	30	30	0.500 0.560
7227	400-480	50-160 50-350	30	FULL	1.500 1.562
7274	200-350	40-160 50-350	FULL	10	0.500 0.560

- 4- CAT. No 7227 MUST HAVE KOVAR LEADS.
- 5 FINAL NI. PLATE TARGET IS 200μ, ACCEPTABLE RANGE IS 50-350μ.
- 6 Measure Thickness on #7244 for 30μ Min Gold Thickness.

C 500344 A

ALL DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED.

DRAWN A. BOJCRQUEZ	CHECKED A. Relatim	DATE 10/11/97	APPROVED FOR PRODUCTION 7/18
PARTS SEE TABLE	MATERIAL STEEL	SPECIFICATION MASS No. 72	
TOLERANCE UNLESS OTHERWISE SPECIFIED: FRACTIONAL DECIMAL ANGULAR SURFACE ROUGHNESS			HEADER, TO-5, SOLID LEADS, WELD RING
SCALE STOCK NO. 157-11111			DWG. NO. C 500344 A.

