


SSM P/N LCC01628

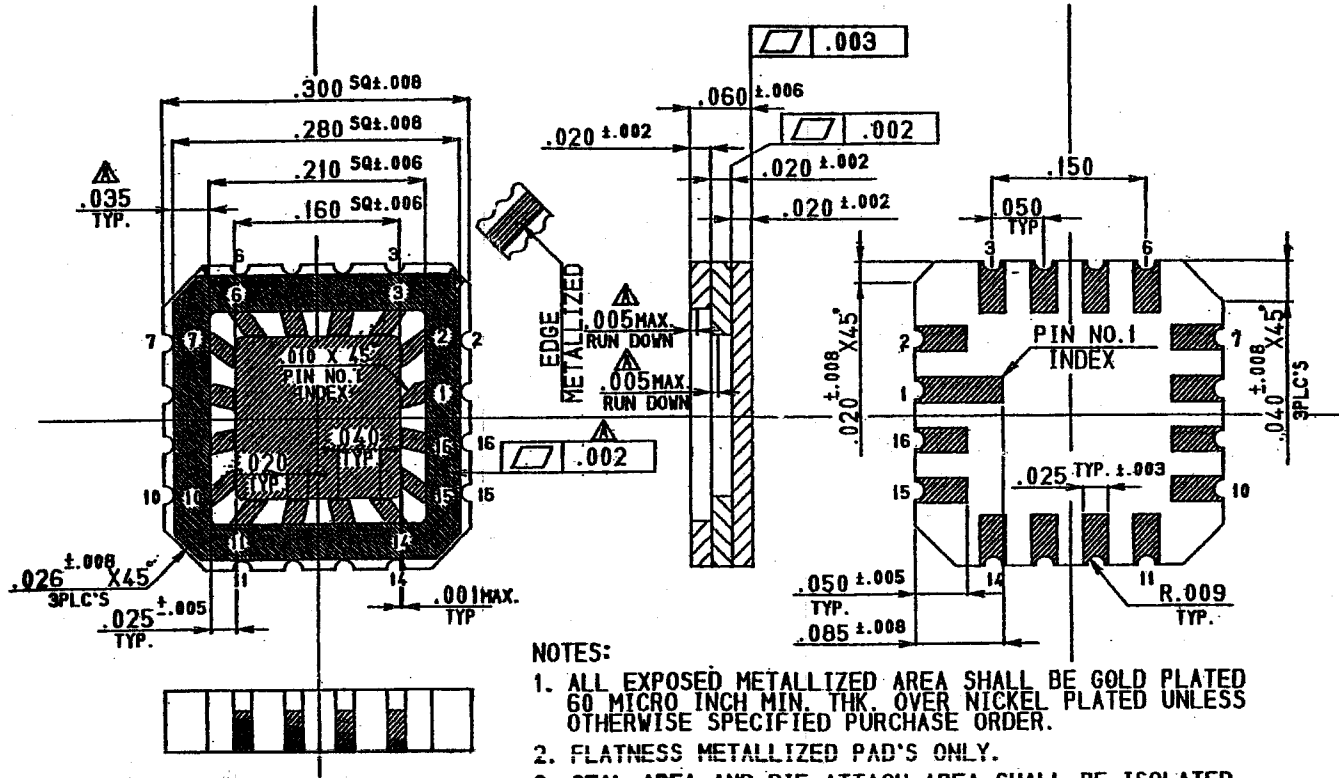

NOTES:

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCH MIN. THK. OVER NICKEL PLATED UNLESS OTHERWISE SPECIFIED PURCHASE ORDER.
2. FLATNESS METALLIZED PAD'S ONLY.
3. SEAL AREA AND DIE ATTACH AREA SHALL BE ISOLATED FROM ANY LEAD'S. (ZERO GROUND)

NWE		16LCC .160 sq. CAV.		TOLERANCES: UNLESS OTHERWISE SPECIFIED		DRAWN (CHECKED) APPROVED DATE		D=0 S=0	
SCALE	10 / 1	MATERIAL	KYOCERA A-430	± .005 TUMBLE PROTECTION		S.M.	T.O.	S.T.	10-28-86
KYOCERA		KYOCERA CORPORATION KYOTO JAPAN		DRAWING NO.		PB-C86636-A		SHEET	



