


SSM P/N LCC03274

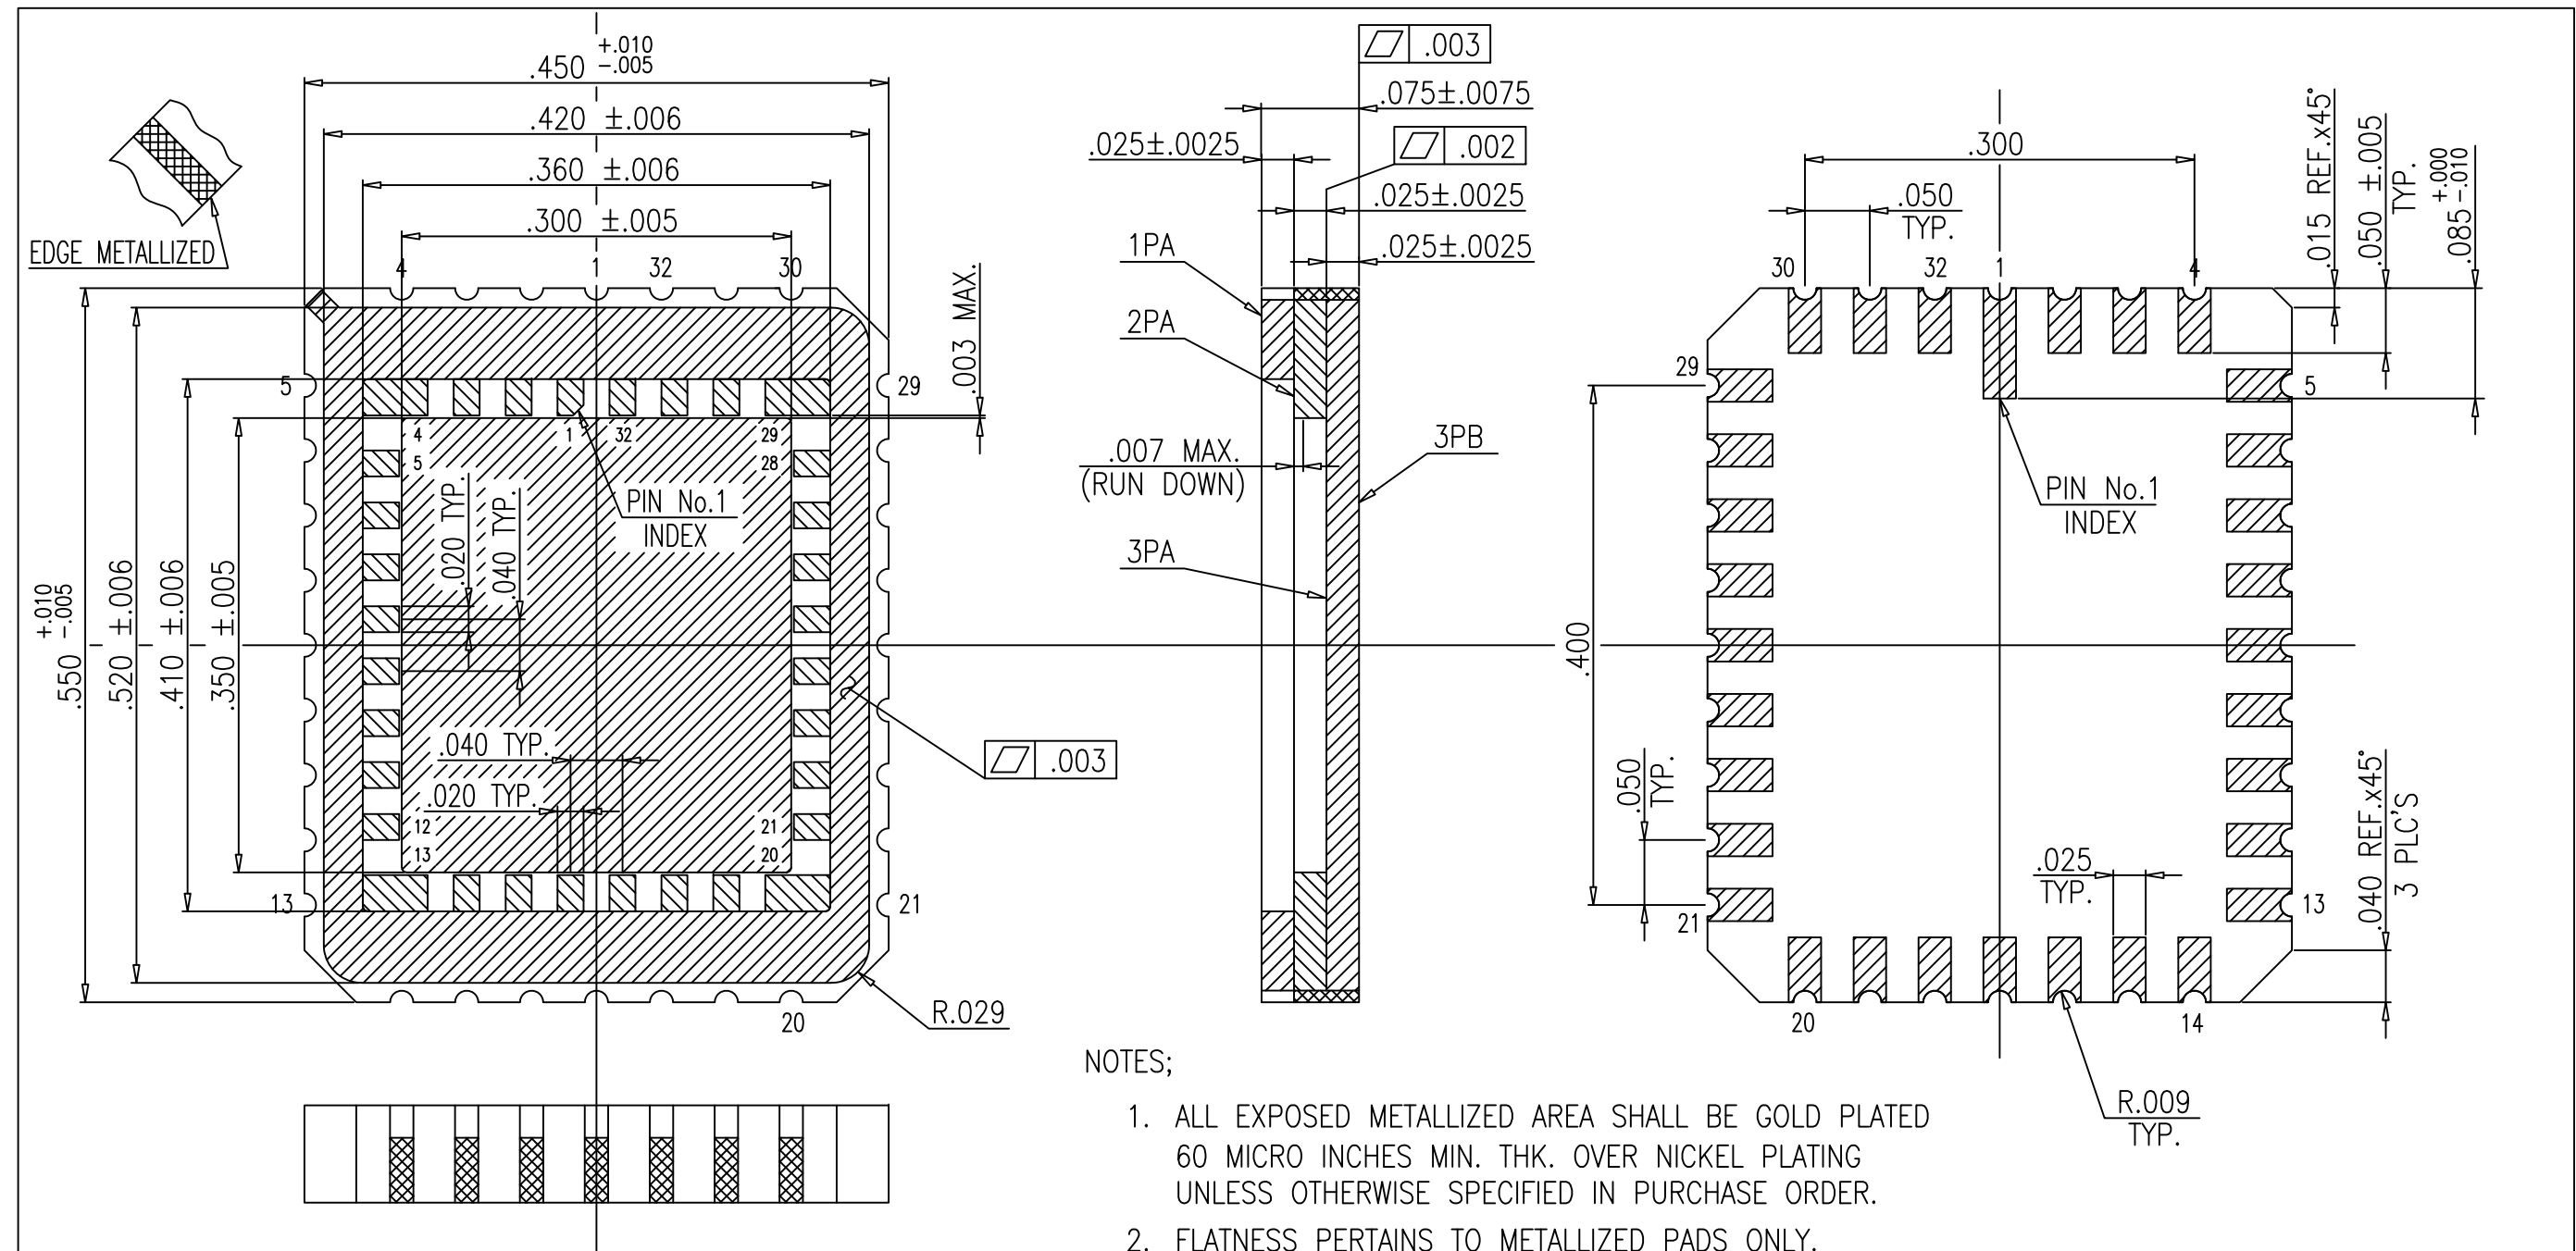

NOTES;

- ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCHES MIN. THK. OVER NICKEL PLATING UNLESS OTHERWISE SPECIFIED IN PURCHASE ORDER.
- FLATNESS PERTAINS TO METALLIZED PADS ONLY.
- SEAL RING AREA AND DIE ATTACH PAD SHALL BE ISOLATED FROM ANY LEADS. (ZERO GROUND)
- LEAD RESISTANCE SHALL BE 0.30 Ω MAX.

MODIFICATIONS						NAME	32 LCC (.300x.350 CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED	MAO-40C	S=0
						SCALE	8 / 1	± .005	DRAWN	D=0
						MATERIAL	KYOCERA A440	THIRD ANGLE PROJECTION	CHECKED	
						KYOCERA CORPORATION KYOTO JAPAN			APPROVED	DATE
CHANGE					DATE	DRAWN	CHECKED	APPROVED	NOV.06.'12	
RF-32C (PB-23777 MOD.)					DRAWING NO.			PB-C88084		SHEET
										1 / 1

