


SSM P/N LCC04416

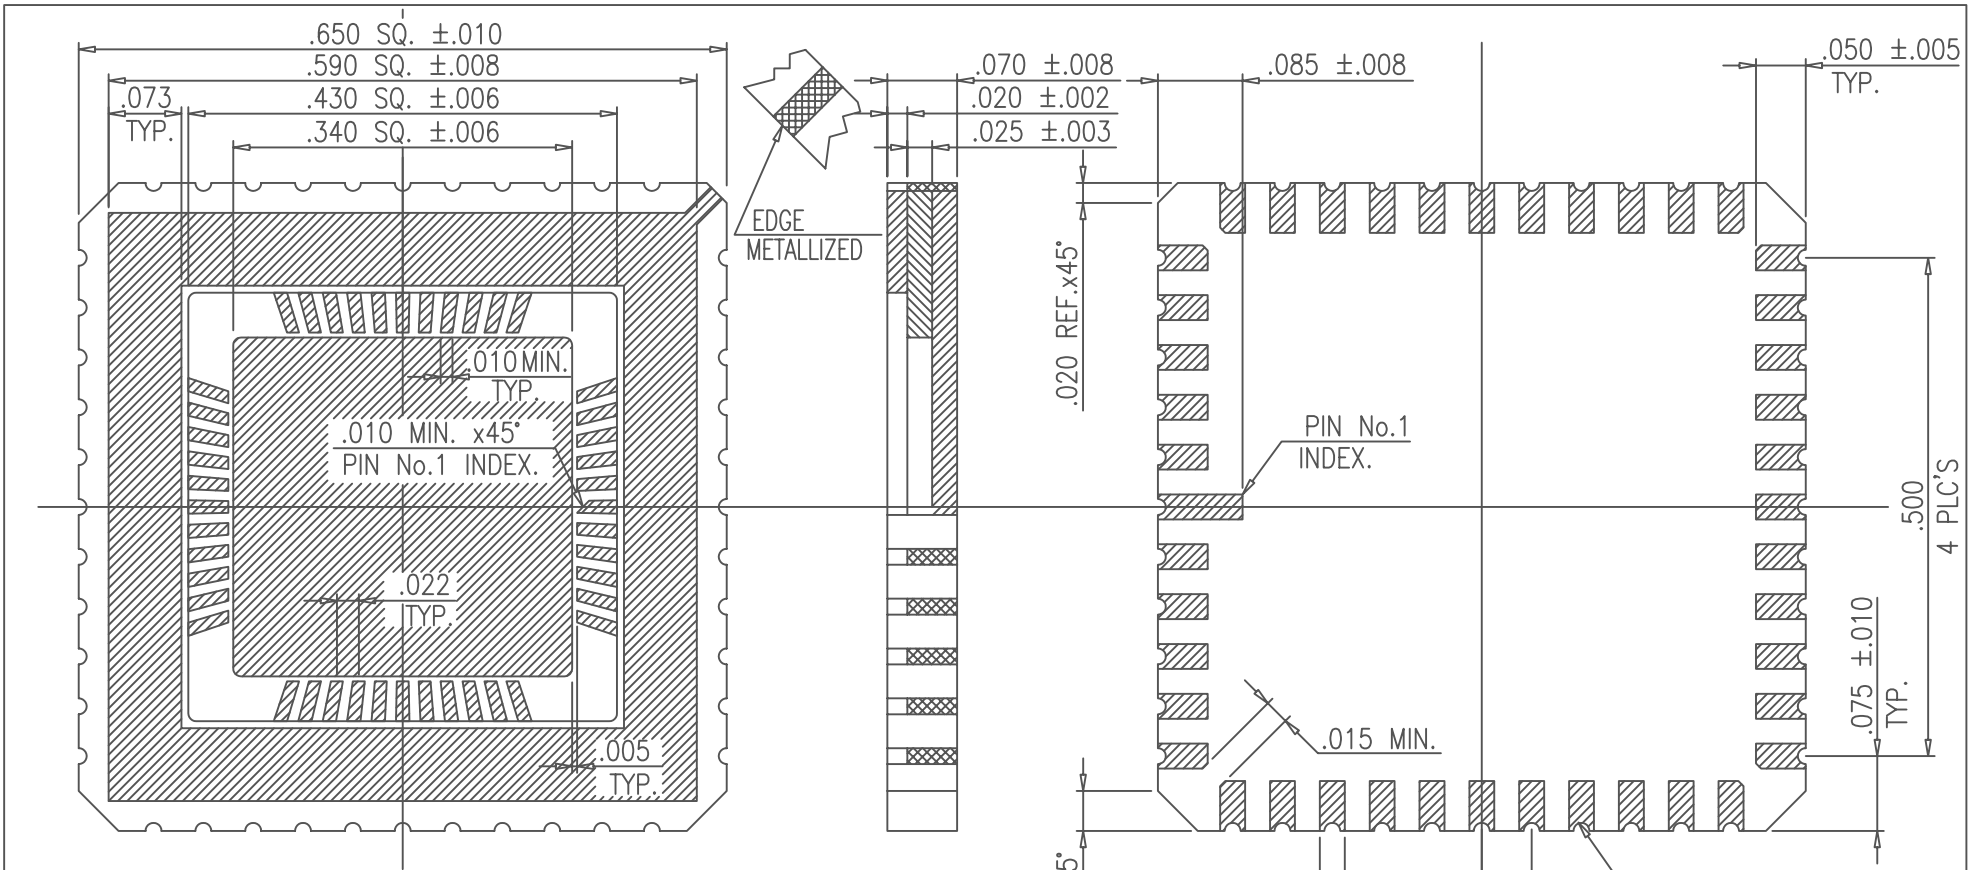

NOTES;

1. ALL EXPOSED METALLIZED AREA SHALL BE GOLD PLATED 60 MICRO INCH MIN. THICKNESS OVER NICKEL PLATED.
2. SEAL RING FLATNESS .003
3. SEAL RING AND DIE ATTACH PAD AREA NOT GROUND TO A

LEAD (ZERO GROUND)

MODIFICATIONS						NAME	44 LCC (.340 SQ. CAV.)	TOLERANCES: UNLESS OTHERWISE SPECIFIED $\pm 1\%$ N.L.T $\pm .005$ THIRD ANGLE PROJECTION	DRAWN	CHECKED	APPROVED	DATE	ABA-44C	
						SCALE	8 / 1		A.N	A.M	Y.S	'81-2-6	S=0 D=0	
		△	CHANGED : PATTERN	85.2.28	H.K	T.I	MATERIAL	KYOCERA A-440						
		△	RE : DRAWN	83.3.16	T.I	O.M								
		CHANGE	DATE	DRAWN	CHECKED	APPROVED		KYOCERA CORPORATION KYOTO JAPAN	DRAWING NO.			PB-12832-B	SHEET 1 / 1	



